

# Apollo 1500



**105**  
**Thredbo**



**175**  
**Franklin**



**515**  
**Pyrenees**



**525**  
**Alpine Gum**



**535**  
**Derwent**



**545**  
**Blackbutt**



**551**  
**Daintree**



**556**  
**Spotted Gum**



**571**  
**Sherbrooke**



**721**  
**Cumberland**



**730**  
**Boston**



**790**  
**Midnight**

# Apollo 1500

Apollo 1500 is a stunning hybrid floor that is extremely hard wearing and stable with a waterproof surface<sup>^</sup>, making it perfect for use in all areas of your home. With micro bevel edges and an embossed matte finish, Apollo 1500 authentically replicates a natural timber wood grain look. A scratch and stain resistant surface coating means Apollo 1500 can easily withstand the everyday wear and tear of busy family homes.

## Technical Data


<b>Type:</b>	Hybrid Flooring	<b>Finish:</b>	Matte
<b>Dimensions:</b>	1500mm x 180mm	<b>Surface:</b>	Embossed
<b>Thickness:</b>	6.5mm	<b>Top Layer:</b>	Decorative Film & Wear Layer
<b>Wear Layer:</b>	0.5mm	<b>Substrate Layer:</b>	Trigon® Core Technology (Limestone Composite)
<b>Units Per Box:</b>	6 boards	<b>Backing Layer:</b>	1.5mm Acoustic Backing
<b>m<sup>2</sup> per box:</b>	1.62	<b>Profile:</b>	Micro Bevel
<b>m<sup>2</sup> per pallet:</b>	113.4	<b>Coating System:</b>	PUR & Scratch Resistance
<b>Colours:</b>	12	<b>Installation Method:</b>	Uniclic®

## Performance

<b>Dimensional Stability:</b>	(ISO 23999) Length: 0.05%, Width: -0.00%, Curling: 0.00%	<b>Light Fastness:</b>	(EN ISO 105-B02) Grade 6
<b>Thermal Resistance:</b>	(EN 12667) 0.056m <sup>2</sup> .K/W	<b>Light Reflectance Values:</b>	Available on Request
<b>Thermal Conductivity:</b>	(EN 12667) 0.115 W/(m.K)	<b>Flammability:</b>	(EN ISO 9239) CRF 10.9kW/m <sup>2</sup>
<b>Abrasion Rating:</b>	(EN 660-2) Group T	<b>Smoke Value:</b>	(EN ISO 9239) 81% minutes
<b>Swelling after submersion in water:</b>	(ISO 24336) 0.3%	<b>Slip Resistance:</b>	(AS 4586) P3
<b>Impact Sound Reduction:</b>	Please refer to Godfrey Hirst Acoustic Performance specification sheet	<b>Warranty:</b>	25 Year Hybrid Limited Residential Warranty*

## Sustainability

<b>Product Transparency:</b>	Global Green Tag, GreenRate Level A certified.
<b>Accreditation:</b>	Manufactured under a quality and environmental system certified and complying with ISO 9001 and ISO 14001 by an accredited certification body.
<b>Global Green Tag:</b>	GreenRate Level A Certified
<b>Indoor Air Quality:</b>	Green Building Council Compliant for VOC emission rate limits

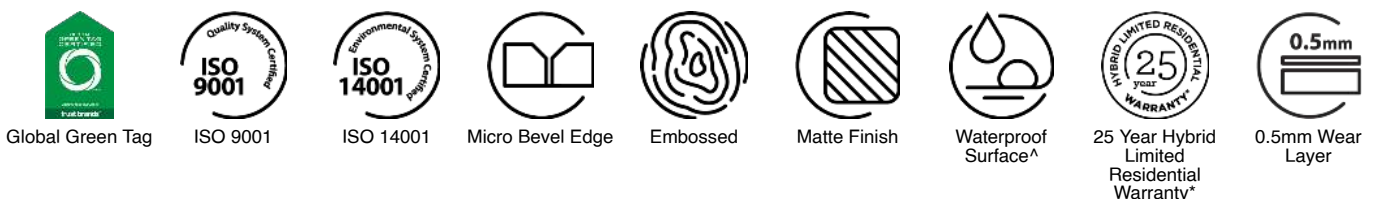

All Godfrey Hirst hybrid floors products must be installed in accordance with relevant Australian Standards and in conjunction with the Godfrey Hirst Hybrid Flooring Installation Instructions.  
 \*This product comes with a residential warranty for new product installed indoors in a residential home, if properly installed and maintained. This warranty is in addition to consumers' rights under the statutory consumer guarantee provisions in the Australian Consumer Law, which may exceed the rights under this warranty. The amount recoverable under the warranty decreases after five years. For full information in respect to the scope and limitations of this warranty, please refer to the full terms and conditions available from your retailer, by calling 1300 444 776, or by download from [www.godfreyhirst.com](http://www.godfreyhirst.com).  
 † Terms and conditions apply to all commercial warranties - contact your GH Commercial Account Manager.  
 ^Subject to proper installation, maintenance and local building code/regulatory approval.

# Apollo 1500



Mid Range



Uniclic®